




IGNITE THE POWER OF NATURE

Polycrystalline Module
--small size 160Watt

Model (SL160TU-18P) Specifications

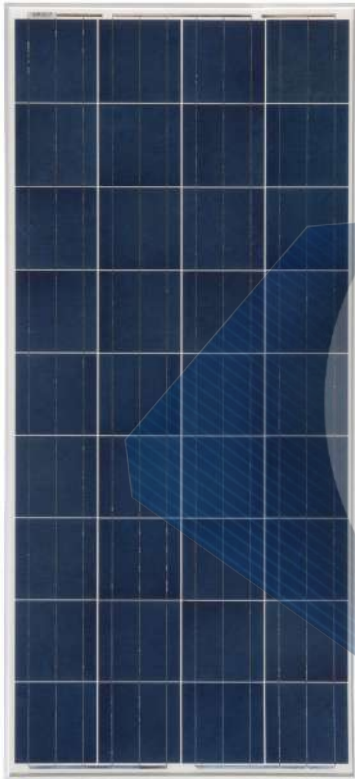

Electrical Data

Maximum Power(W)	160W
Optimum Power Voltage(Vmp)	18.93V
Optimum Operating Current(Imp)	8.45A
Open Circuit Voltage(Voc)	22.57V
Short Circuit Current(Isc)	9.04A
Cell Efficiency	18.63%
Module Efficiency	16.13%
Tolerance Wattage	0~+3%
NOCT	45°C +/-2°C

Benefits

- ☐ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ☐ Bypass diode minimizes the power drop caused by shade;
- ☐ Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- ☐ Modules independently tested to ensure conformance with certification and regulatory standards;
- ☐ Manufacturing facility certified to ISO 9001 quality management system standards.

Modules sorted by current, optimizing system power generation

High Efficiency

Stable Power <math><1\%</math>

Low Carbon Emission

Excellent Weather Resistance

Applications

- ☐ On-grid residential roof-tops
- ☐ On-grid commercial/industrial roof-tops
- ☐ Solar power stations
- ☐ Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)/°C	+0.04
Temperature Coefficients of Voc(%)/°C	-0.38
Temperature Coefficients of Pm(%)/°C	-0.47
Temperature Coefficients of Im(%)/°C	+0.04
Temperature Coefficients of Vm(%)/°C	-0.38





IGNITE THE POWER OF NATURE

Polycrystalline Module
--small size 160Watt

Components & Mechanical

Solar Cell	156*156 Poly
Number of Cell(pcs)	4*9
Size of Module(mm)	1485*668*35
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	11.6
Bypass Diode Rating(A)	10
Frame(Material Corners,etc.)	35#
Temperature Range	-40°C to +85°C
FF (%)	70-79%
Standard Test Conditions	AM1.5 1000W/m ² 25°C


Packing

Packing	Wooden Box
Pieces per container	30pcs/Pallets

Project Picture



Engineering Drawings

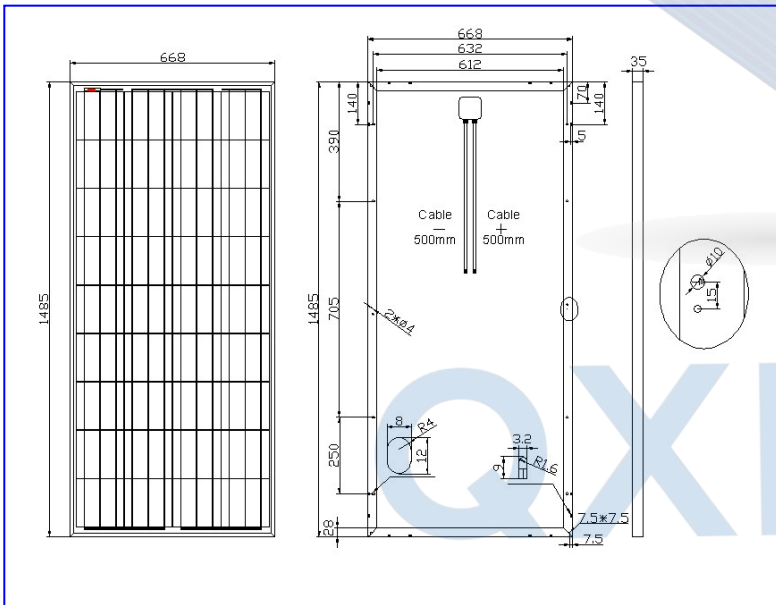

©2018 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved.
Specifications included in this datasheet are subject to change without notice.

Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park,
Xiangshan County, Ningbo, 315700, China

WEB: <http://www.nbqxsolar.com>

TEL: 0086-(0)574-25758823

FAX: 0086-(0)574-25758824

E-mail: sales@nbqxsolar.com

